


PLL-LNB \pm 300 kHz

Features:

- High LO Stability
- Low Phase Noise
- Low Noise Figure
- Wide Frequency Range
- F- or N-connector
- Two-year warranty

Options:

- Selected LO Stability
- Customized gain & variation
- Sep. DC power input
- Customized LO frequency
- SMA output connector
- Extended Frequency Range

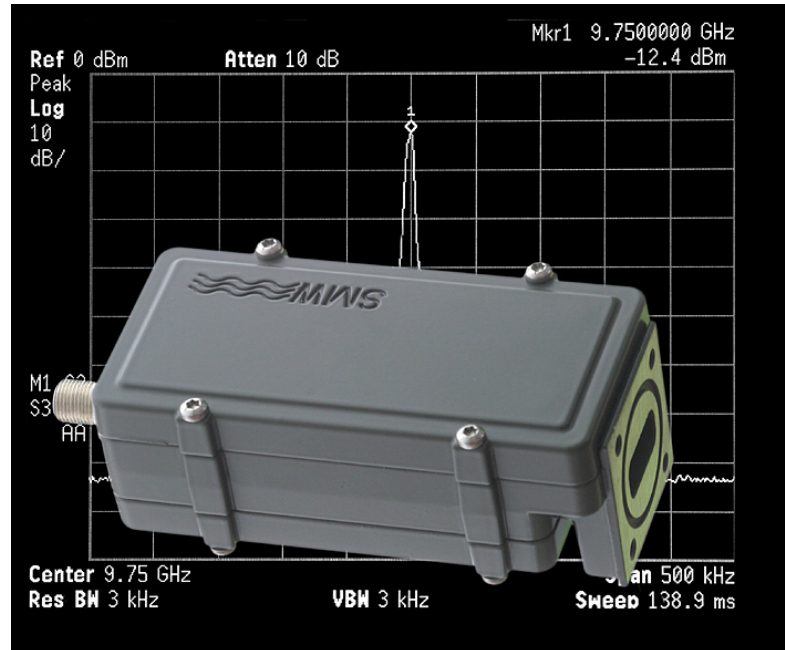

All our LNBS are individually hand tuned to get the very best performance available for each unit. Quality and long term reliability is also essential. Therefore are all LNBS tested according to a very extensive test program, which includes heating, cooling, water-proof testing and rigorous electrical testing.

Swedish Microwave was founded 1986 and, within Europe, is the oldest manufacturer of LNBS. In the standard product range we have DRO-LNBS, PLL-LNBS, LNAs, Block Downconverters (BDC), Up- & Down Converters, Quattro LNBS, Twin LNBS, Ortho mode transducers (OMT), Line Amplifiers and Feed horns.

Swedish Microwave is today one of the leading manufacturers of microwave components needed for satellite receiving equipment and other industrial products.

Specification SMW PLL-LNB

SMW PLL	9.75 GHz	10.0 GHz	10.25 GHz	10.5 GHz	10.6 GHz
Frequency range	10.7 - 11.8 GHz	10.95 - 12.1 GHz	11.2 - 11.7 GHz	11.45 - 12.2 GHz	11.7 - 12.75 GHz
LO frequency	9.75 GHz	10.0 GHz	10.25 GHz	10.5 GHz	10.6 GHz
Output frequency	950 - 2050 MHz	950 - 2100 MHz	950 - 1450 MHz	950 - 1700 MHz	1100 - 2150 MHz
SMW PLL	10.75 GHz	11.2 GHz	11.25 GHz	11.3 GHz	11.475 GHz
Frequency range	11.7 - 12.75 GHz	12.2 - 12.75 GHz	12.2 - 12.75 GHz	12.25 - 12.75 GHz	12.5 - 12.75 GHz
LO frequency	10.75 GHz	11.2 GHz	11.25 GHz	11.3 GHz	11.475 GHz
Output frequency	950 - 2000 MHz	1000 - 1550 MHz	950 - 1500 MHz	950 - 1450 MHz	1025 - 1275 MHz
General Specification					
LO Stability (over temp.)	± 300 kHz				
Gain typ.	54 dB				
Gain variation	± 4 dB within the band ± 0.4 dB within 30 MHz				
Noise Figure, typical	0.8 dB				
LO Phase noise typical	-75 dBc @ 1 kHz -80 dBc @ 5 kHz -85 dBc @ 10 kHz -110 dBc @ 100 kHz -120 dBc @ >1 MHz				
LO radiation	-60 dBm				
Image rejection	40 dB min				
1 dB gain compression point	+5 dBm				
Input	WR-75 waveguide (R120)				
Output (waterproof)	F-connector 75 ohm or N-connector 50 ohm				
Output VSWR	2.1:1 max				
DC power	12 - 24 V 250 mA max				
Operating temperature	-30 to +60°C				
Dimensions	122 (127 N) x 56 x 44 mm				
Weight	329 g (F-connector) 345 g (N-connector)				
Options	Customized gain and variation Sep. DC power input Customized LO frequency SMA output connector (waterproof) Extended frequency range e.g. LO 11.3 with 12.25 - 13.25 GHz				
Enclosed accessories	O-ring Screw M4 x 8 4 pcs Small M4 key				

