


Partitori "Skylink" con 2, 3, 4, 6 e 8 uscite in pressofusione, banda 5-2400 MHz



Partitori con connettori "F".
Passaggio di cc su tutte le uscite.

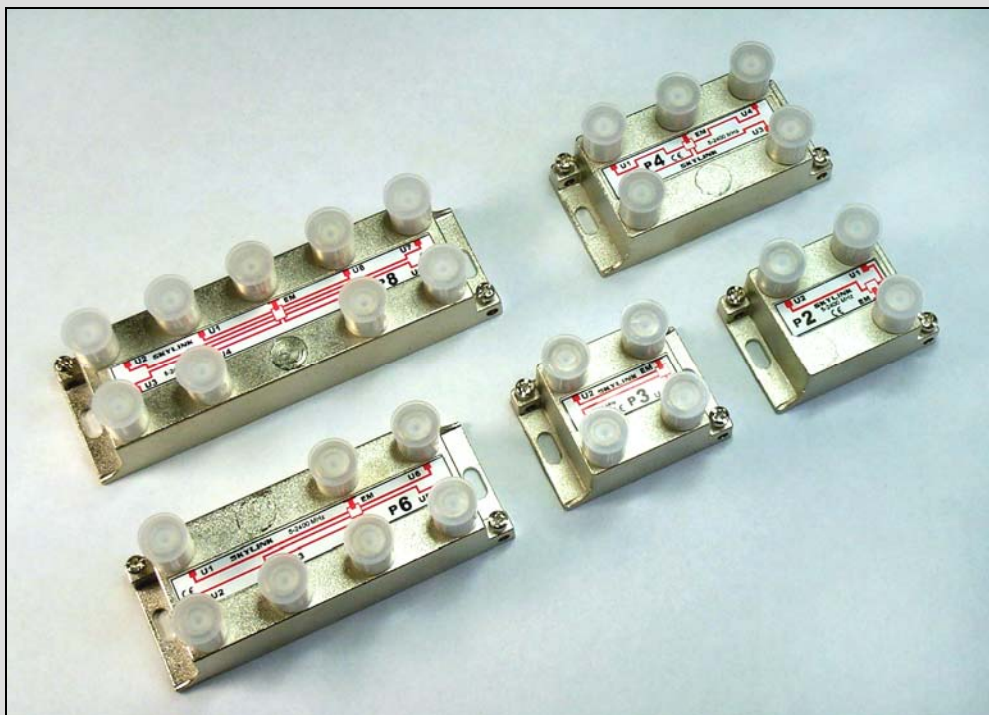

	MHz	P2 2 Out	P3 3 Out	P4 4 Out	P6 6 Out	P8 8 Out
Perdita d'Inserzione	4-40	4 dB	7 dB	7,5 dB	10,5 dB	12 dB
	40-470	4 dB	8 dB	8,5 dB	10,5 dB	12 dB
	470-1000	4,5 dB	8 dB	9 dB	12 dB	13,5 dB
	1000-1750	5,5 dB	10 dB	11 dB	13,5 dB	15,5 dB
	1750-2050	5,5 dB	10,5 dB	11,5 dB	14,5 dB	16,5 dB
	2040-2400	6 dB	11 dB	12 dB	16 dB	17 dB
Disacc. out-out	4-40	22 dB	22 dB	30 dB	22 dB	20 dB
	40-470	22 dB	22 dB	30 dB	22 dB	20 dB
	470-1000	20 dB	22 dB	25 dB	22 dB	20 dB
	1000-1750	20 dB	22 dB	26 dB	22 dB	20 dB
	1750-2050	20 dB	22 dB	22 dB	22 dB	20 dB
	2040-2400	23 dB	22 dB	22 dB	22 dB	20 dB
Return Loss	4-40	12 dB	10 dB	10 dB	9 dB	9 dB
	40-470	12 dB	11 dB	12 dB	10 dB	10 dB
	470-1000	10 dB	11 dB	12 dB	10 dB	10 dB
	1000-1750	10 dB	11 dB	12 dB	11 dB	10 dB
	1750-2050	10 dB	11 dB	10 dB	11 dB	10 dB
	2040-2400	10 dB	11 dB	10 dB	11 dB	10 dB
Dimensione		49x35x29 mm	49x35x29 mm	71x35x29 mm	93x35x29 mm	114x35x29 mm
Peso		55 gr.	58 gr.	82 gr.	105 gr.	130 gr.

Disponibile in Confezioni da 10 pezzi.